

# 17540

17541, 17542, 17543, 17608, 17609

## FLAT TILE ROOF HOOK FOR SIDE MOUNT RAILS



A DIVISION OF QUICKSCREWS INTERNATIONAL CORP

# TABLE OF CONTENTS

3

## SPEC SHEET

QTY & MEASUREMENT INFORMATION

---

4

## UL CERTIFICATION

PROOF OF UL CERTIFICATION

---

6

## INSTALLATION INSTRUCTIONS

STEP-BY-STEP-INSTALLATION GUIDE

---

7

## BUILDING CODE LETTER

REGARDING STAMP DATES

---

8

## ENGINEERING REPORT

UPLIFT & LATERAL LOAD TEST

---

12


## AZ TEST RESULTS

SPECIFIC TESTING FOR ARIZONA COUNTIES





---

# SPEC SHEET

Part #	Box Quantity	Screw Size
17540	20 Hooks	N/A
17541	1 Hook	N/A
17542	20 Hooks; 40 Screws	#14 x 3"
17543	1 Hook; 2 Screws	#14 x 3"
17608	20 Hooks; 40 Screws	5/16" x 3"
17609	1 Hook; 2 Screws	5/16" x 3"

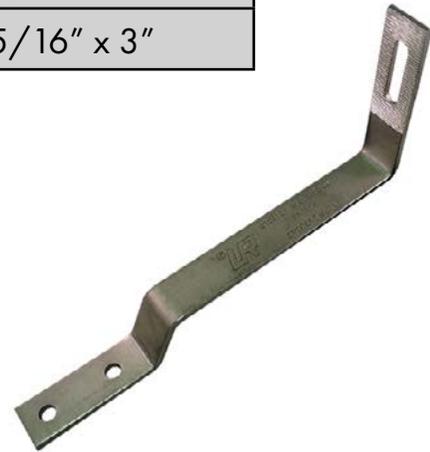

Letter	Description	Size/Length
A	Mounting Screw Holes	9mm
B	Rail Slot Size	10mm x 46mm
C	Length of Roof Hook	286mm
D	Rail Height From Finised Roof	70mm - 108mm
E	Thickness	5mm

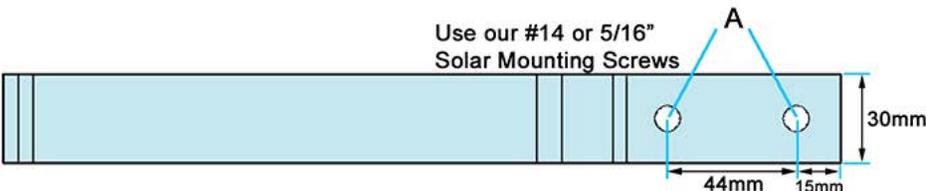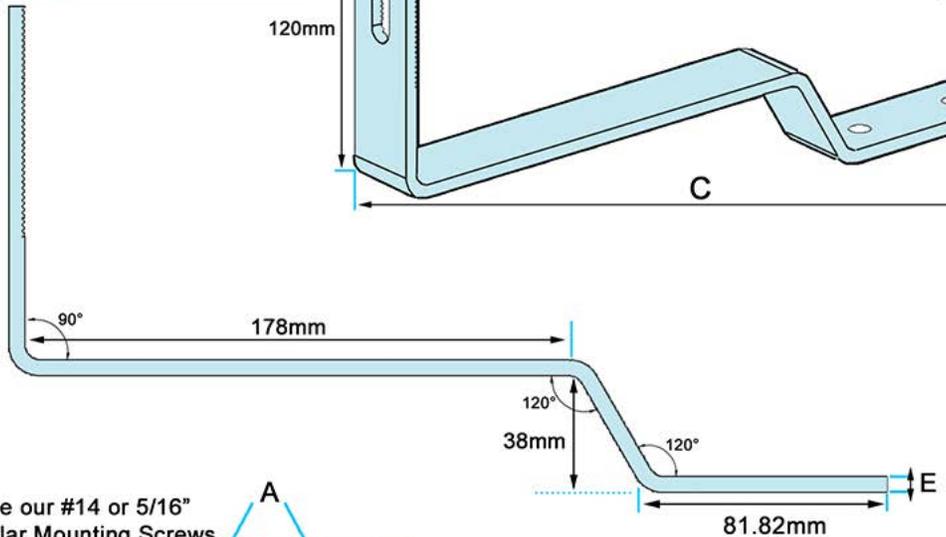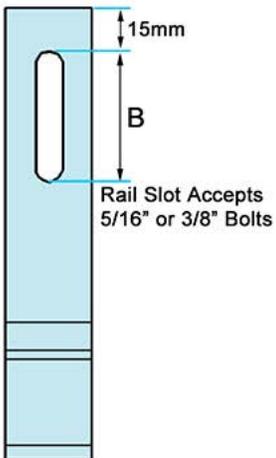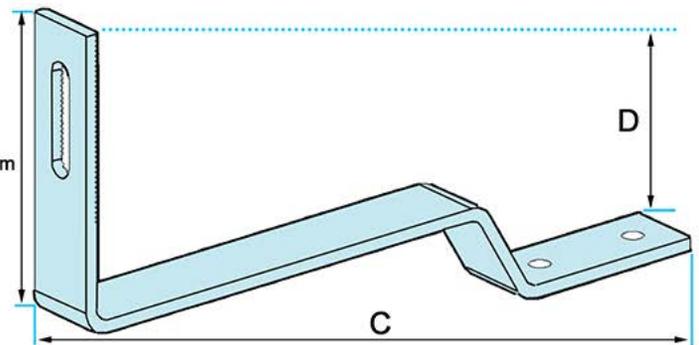

Use our #14 or 5/16" Solar Mounting Screws

## CERTIFICATE OF COMPLIANCE

**Certificate Number** E493748  
**Report Reference** E493748-20170817  
**Date** 2023-April-07

**Issued to:** QuickBOLT a Division of Quickscrews International Corp  
5830 Las Positas Rd  
Livermore CA, 94551 US

**This is to certify that representative samples of** MOUNTING SYSTEMS, MOUNTING DEVICES, CLAMPING DEVICES AND GROUND LUGS FOR USE WITH PHOTOVOLTAIC MODULES AND PANELS - COMPONENT  
See Addendum Page for Product Designation(s).

Have been evaluated by UL in accordance with the component requirements in the Standard(s) indicated on this Certificate. UL Recognized components are incomplete in certain constructional features or restricted in performance capabilities and are intended for installation in complete equipment submitted for investigation to UL LLC.


**Standard(s) for Safety:** UL 2703, Mounting systems, mounting devices, clamping/retention devices, and ground lugs for use with flat-plate photovoltaic modules and panels-.

**Additional Information:** See the UL Online Certifications Directory at <https://iq.ulprospector.com> for additional information

This Certificate of Compliance indicates that representative samples of the product described in the certification report have met the requirements for UL certification. It does not provide authorization to apply the UL Recognized Component Mark. Only the Authorization Page that references the Follow-Up Services Procedure for ongoing surveillance provides authorization to apply the UL Mark.

Only those products bearing the UL Recognized Component Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Recognized Component Mark on the product.



Deborah Jennings-Conner, VP Regulatory Services

UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>



# CERTIFICATE OF COMPLIANCE

**Certificate Number** E493748  
**Report Reference** E493748-20170817  
**Date** 2023-April-07

This is to certify that representative samples of the product as specified on this certificate were tested according to the current UL requirements

**Models:**

USR – Component, Roof Mounting Hook Units, Models 15891 15893 15987 16000 16317 16318 16319 16320 16988 16990 16991 16993 17508 17509 17510 17511 17512 17513 17514 17515 17516 17517 17518 17519 17520 17521 17522 17523 17524 17525 17526 17527 17536 17537 17538 17539 17540 17541 17542 17543 17544 17545 17546 17547 17548 17549 17550 17551 17552 17553 17554 17555 17556 17558 17559 17560 17566 17567 17568 17569 17570 17571 17572 17573 17574 17575 17576 17577 17578 17579 17580 17585 17586 17587 17588 17589 17592 17596 17597 17598 17599 17600 17601 17606 17607 17608 17609 17610 17611 17612 17613 17614 17615 17616 17617 17618 17620 17621 17622 17623 17624 17625 17626 17627 17628 17629 17630 17631 17632 17633 17636 17637 17638 17639 17640 17641 17642 17643 17646 17647 17648 17649 17650 17651 17652 17653 17654 17659 17664 17667 17669 17670 17671 17672 17673 17678 17679 17680 17681 17686 17687 17688 17689 17700 17701 17702 17703 17704 17705 17706 17707 17708 17709 17710 17711 17712 17717 17718 17750 17751 17752 17753 17759 15891-10 15891BLK-10 15987A 15987B 17667SS 17672SS 17680SS 17688SS 17713SS 17720 17721SS 17723 17724SS 17726 17727SS 17729 17730SS 15894SS 15891SS 15987BSS 17660 17661 17662 17663 17747 17748

*Deborah Jennings-Conner*

Deborah Jennings-Conner, VP Regulatory Services

UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>



# INSTALL INSTRUCTIONS



## RECOMMENDED MATERIALS

- Rafter locator
- Chalk or crayon
- Drill Bit
- Manufacturer's approved sealant

## INSTALLATION INSTRUCTIONS

1. Remove the tiles from the install area
2. Locate and mark the rafters
3. Place the mount and predrill holes
4. Fill the predrilled holes with mfg. approved sealant
5. Drive the Mounting Screws
6. Place the tiles back over the roof mount

## IF USING GALVA FLASHING

1. Make a cut in the paper
2. Apply sealant to the underside of the Galva Flashing
3. Slide the Flashing underneath the paper or nail down edges
4. Cover the edges of the Galva Flashing with sealant



PN 15991

# BUILDING CODE LETTER



March 22<sup>nd</sup>, 2023

To whom this may concern,

QuickBOLT is committed to excellence. The parts tested are durable goods, meaning the material composition and detailed specifications of the parts do not change. Therefore, all stamps are current. Any part tested will have the same results no matter what year the tests are performed. All testing and reports are current and valid with 2022 CBC standards.

SolarRoofHook is the previous name of QuickBOLT. Any test result referencing SolarRoofHook is referring to a QuickBOLT product.

All our parts were tested by a third-party test facility, in possession of a current engineering license for the state where the tests were performed for the following.

1. Uplift test
2. Downward load test
3. Lateral Test – Asphalt Mounts, and Metal Mounts only
4. ASTM E2440 and ASTM E330 Waterproof Tests - QuickBOLT only

The following is an excerpt from:

CALIFORNIA BOARD FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS  
guide to Engineering & Land Surveying for City and County Officials  
Page 12, Line 27

**27. If the license has expired between the time the engineering documents were prepared and the time when the local agency's review is performed, do the documents need to be re-sealed by a licensee with a current license? (B&P Code §§ 6733, 6735, 6735.3, 6735.4)**

**As long as the license was current at the time the engineering documents were prepared, the documents do not need to be re-sealed prior to review by the local agency. However, any changes (updates or modifications) to the documents that are made following the review by the local agency would have to be prepared by a licensed engineer with a current license and those changes would have to be signed and sealed.**

We trust the information provided will resolve any request for the test reports submitted to have a stamp from the current year.

Regards,

Rick Gentry  
Executive Vice President

# ENGINEERING REPORT



APPLIED MATERIALS & ENGINEERING, INC.

980 41<sup>st</sup> Street  
Oakland, CA 94608

Tel: (510) 420-8190  
FAX: (510) 420-8186  
e-mail: info@appmateng.com

July 25, 2012

Mr. Rick Gentry  
**QUICKSCREWS INTERNATIONAL**  
5830 Las Positas Road  
Livermore, CA 94551

Project Number 112448C

**Subject:** Flat Tile Roof Hook (Part #FTRH90) Laboratory Load Testing

Dear Mr. Gentry:

As requested, Applied Materials & Engineering, Inc. (AME) has completed load-testing flat tile roof hook (see Appendix A, Figure 1). The purpose of our testing was to evaluate the tensile and compressive load capacity of the flat tile roof hook attached to a 2"x4" Douglas Fir rafter using #12 Quickscrew (5/16"Øx 3" L T17 302 SS).

## SAMPLE DESCRIPTION

Mockup samples were delivered to our laboratory on July 6, 2012. Mockup configuration consisted of three 16" long rafters at 7" o.c., screwed to 1/2" OSB sheathing. The flat tile roof hook is attached through the OSB into the rafter with two fasteners.

## TEST PROCEDURES & RESULTS

### **1. Compressive Load Test**

A total of three tests were conducted for compressive load capacity on July 9, 2012 using a United Universal testing machine. Samples were rigidly attached to the testing machine and a compressive load was applied to the hook. The samples were loaded in compression at a constant rate of axial deformation of 0.09 in. /min. without shock until the bracket was in contact with the OSB sheathing; maximum deflection at maximum load was recorded. Detailed results are provided in Table I. Test setup and typical bracket bending at maximum load are provided in Appendix A. Based on the above testing, the average maximum compression load of the flat tile roof hook attached to a 2"x4" Douglas Fir rafter using #12 Quickscrew was determined to be 141 lbf.

### **2. Tensile Load Test**

A total of three tests were conducted for tensile load capacity on July 9, 2012 using a United Universal testing machine. Samples were rigidly attached to the testing machine and a tensile load was applied to the hook. The samples were loaded in tension at a constant rate of axial deformation of 0.09 in. /min. without shock until the bracket was bent and the bolt began to pull-out; maximum deflection at maximum load was recorded. Detailed results are provided in Table II.

Mr. Rick Gentry  
QUICKSCREWS INTERNATIONAL  
Flat Tile Roof Hook  
July 25, 2012

Project Number 112448C

Test setup and typical bracket bending at maximum load are provided in Appendix A. Based on the above testing, the average maximum tensile load of the flat tile hook attached to a 2"x4" Douglas Fir rafter using #12 Quickscrew was determined to be 203 lbf.


### 3. Specific Gravity of Wood

The specific gravity and moisture content of the lumber (rafter) were tested in accordance with ASTM D2395, Method A (oven-dry) and was determined to be 0.457 and 12.9 %, respectively.


If you have any questions regarding the above, please do not hesitate to call the undersigned.

Respectfully Submitted,

**APPLIED MATERIALS & ENGINEERING, INC.**

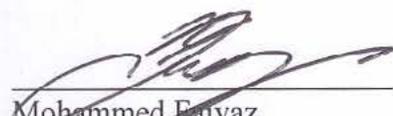  
Mohammed Fayaz  
Laboratory Manager

**Reviewed By:**

  
Armen Tajirian, Ph.D., P.E.  
Principal



**TABLE I**  
**COMPRESSIVE LOAD TEST RESULTS**  
**FLAT TILE ROOF HOOK (PART #FTRH90)**  
**PROJECT NUMBER 112448C**

<b>SAMPLE ID</b>	<b>MAXIMUM COMPRESSIVE LOAD (lbf)</b>	<b>MAXIMUM DEFLECTION (in.)</b>	<b>FAILURE MODE</b>
FTC-1	135	2.2	Bent Hook
FTC-2	141	2.2	Bent Hook
FTC-3	146	2.2	Bent Hook
<b>AVERAGE</b>	<b>141</b>	<b>2.2</b>	<b>..</b>

**TABLE II**  
**TENSILE (UPLIFT) LOAD TEST RESULTS**  
**FLAT TILE ROOF HOOK (PART #FTRH90)**  
**PROJECT NUMBER 112448C**

<b>SAMPLE ID</b>	<b>MAXIMUM TENSILE LOAD (lbf)</b>	<b>MAXIMUM DEFLECTION (in.)</b>	<b>FAILURE MODE</b>
FTT-1	230	3.7	Bent Hook
FTT-2	200	3.3	Bent Hook
FTT-3	179	2.9	Bent Hook
<b>AVERAGE</b>	<b>203</b>	<b>3.3</b>	..

# AZ TEST RESULTS

Mr. Rick Gentry  
Quickscrews International  
SolarRoofHook.com  
5830 Las Positas Road  
Livermore, CA 94551



Subject: Uplift, Compressive Load, and Lateral Load Test of QS #17541 (Kit #17543) 90° Flat Tile Roof Hook.

Dear Mr. Gentry,

Per our service agreement, PNL has tested the 90° Flat Tile Roof Hook. The tests performed were a tensile load (uplift) test, compressive load test, and shear load (lateral load) test. A total of two roof hooks were tested for each load type. The samples submitted were the roof hook and screws from Kit #17543. The submitted sample materials are the same roof hook and screws in Part #17540, #17541, and Kit #17542.

## **INITIAL SETUP**

Each roof hook was attached to a Douglas Fir 2"x4" using two #14 x 3" Solar Mounting Screws. The 2"x4" rafter and plywood test fixtures were assembled in our laboratory by using 5/16" x 3-1/8" RSS Rugged Structural screws to connect three 12 in. long 2"x4" douglas fir rafters to the 12 mm Birch plywood. Each 2"x4" rafter was connected to the plywood using two screws at each end of the 12 in. long 2"x4" (See Page 6 for photos and details).

## **TEST PROCEDURE**

### ***Tensile Load (Uplift) Test***

A total of two tests were conducted for tensile load (uplift) capacity on an Instron Universal Test Machine (UTM). The test samples were rigidly attached to the test machine using clamps and a tensile load was applied to the roof hook. The tensile load was applied at a constant rate of 0.09 in./min. without shock until failure. The load and displacement at failure were recorded and the failure mode was documented in photos. The average tensile load of the 90° Flat Tile Roof Hook attached to the 2"x4" using the #14 x 3" Solar Mounting screws was 1507 lbf. Additional details and photographs are supplied on page 3.

### ***Compressive Load Test***


A total of two tests were conducted for compressive load capacity on a UTM. The test samples were rigidly attached to the test machine using clamps and a compressive load was applied to the roof hook. The compressive load was applied at a constant rate of 0.09 in./min. without shock until the roof hook came into contact with the plywood base. The load and displacement at contact were


recorded and the failure mode was documented in photos. The average compressive load of the 90° Flat Tile Roof Hook attached to the 2"x4" using the #14 x 3" Solar Mounting screws was 129 lbf. Additional details and photographs are supplied on page 4.

### ***Shear Load (Lateral Load) Test***

A total of two tests were conducted for shear load (lateral load) capacity on a UTM. The test samples were rigidly attached to the test machine using clamps so that a compressive load could be applied to the roof hook in a direction parallel to the 2"x4" rafters. The shear load was applied at a constant rate of 0.09 in./min. without shock until the roof hook until failure. The load and displacement at tact were recorded and the failure mode was documented in photos. The average compressive load of the 90° Flat Tile Roof Hook attached to the 2"x4" using the #14 x 3" Solar Mounting screws was 316 lbf. Additional details and photographs are supplied on page 5.

Respectfully Submitted,  
**PHOENIX NATIONAL LABORATORIES, INC.**

  
\_\_\_\_\_  
Kyle Fleege, P.E.  
Project Manager  
PNL  
Ph: 602.431.8887  
[kyle@pnltest.com](mailto:kyle@pnltest.com)  
[www.pnltest.com](http://www.pnltest.com)

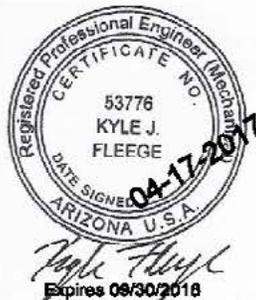

CLIENT		CLIENT PROJECT REF. NO.		CLIENT ORDER NO.	
SolarRoofHook		17540, 17541, 17542, 17543		Per S.A.	
SAMPLE DESCRIPTION			ROOF HOOK ID		PRODUCT KIT ID
90° Flat Tile Roof Hook, 38 mm Height			17541, 17543		17540, 17542
MATERIAL SUBMITTED BY		PNL PROJECT NO.	S.O. NO.	PNL LAB NO.	REPORT DATE
Client		26-170169	001	ML827506	04/11/2017
TEST SPECIFICATIONS & EQUIPMENT INFORMATION					
TEMPERATURE:		73° ± 3°F		HUMIDITY:	
EQUIPMENT MODEL:		Instron 5985		SERIAL NO:	
LOAD CELL:		50 kN (11,240 lbf)		SERIAL NO:	
TEST SPEED:		0.09 in./min.		FASTENER TYPE:	
FASTENER LOCATION:		Fasteners (Qty 2) installed in mounting screw slots.			
TENSILE LOAD (UPLIFT) TEST DATA					
NO.	MAXIMUM LOAD (lbf)	DISPLACEMENT AT LOAD (in.)	OBSERVATIONS		
1	1346.6	6.612	Fastener pullout and permanent deformation failure.		
2	1666.7	6.556	Fastener pullout and permanent deformation failure.		
AVG.	1506.7	6.584			

**PHOTOS**



Photo 1: Tensile Test Setup



Photo 2: Tensile Test Setup



Photo 3: Typical Failure Mode - Fastener Pullout

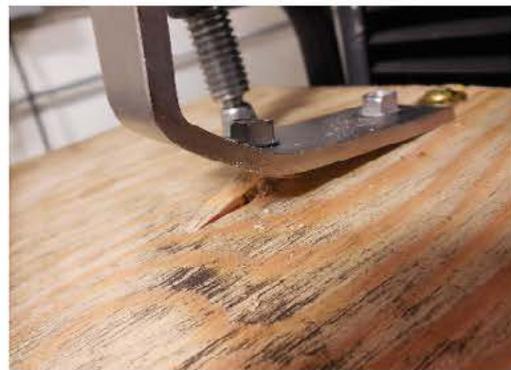


Photo 4: Closeup of Fastener Pullout



**Phoenix National Laboratories, Inc.**  
 2837 E. Chambers Street, Phoenix, AZ 85040  
 P: 602.431.8887 · F: 602.431.8889 · www.pnltest.com

# LABORATORY TEST REPORT

## COMPRESSION LOAD

90° Flat Tile Roof Hook  
 w/ 9 mm mounting screw slot

CLIENT	CLIENT PROJECT REF. NO.	CLIENT ORDER NO.		
SolarRoofHook	17540, 17541, 17542, 17543	Per S.A.		
SAMPLE DESCRIPTION	ROOF HOOK ID	PRODUCT KIT ID		
90° Flat Tile Roof Hook, 38 mm Height	17541, 17543	17540, 17542		
MATERIAL SUBMITTED BY	PNI PROJECT NO	S.O. NO	PNI IAR NO	REPORT DATE
Client	26-170169	001	ML827506	04/11/2017

### TEST SPECIFICATIONS & EQUIPMENT INFORMATION

TEMPERATURE:	73° ± 3°F	HUMIDITY:	50 ± 5%
EQUIPMENT MODEL:	Instron 5985	SERIAL NO:	5985U1246
LOAD CELL:	10 kN (2,248 lbf)	SERIAL NO:	204786
TEST SPEED:	0.09 in./min.	FASTENER TYPE:	#14 x 3" Solar Mounting Screws
FASTENER LOCATION:	Fasteners (Qty 2) installed in mounting screw slots.		

### COMPRESSION LOAD TEST DATA

NO.	MAXIMUM LOAD (lbf)	DISPLACEMENT AT LOAD (in.)	OBSERVATIONS
3	132.0	1.690	Test Hook permanently deformed and came into contact with plywood base
4	126.1	1.602	Test Hook permanently deformed and came into contact with plywood base.
AVG.	129.1	1.646	

## PHOTOS



Photo 5: Compression Test Setup



Photo 6: Compression Test Setup



Photo 7: Hook Contact with Plywood



Photo 8: Typical Failure - Contact with Plywood



Phoenix National Laboratories, Inc.  
 2837 E. Chambers Street, Phoenix, AZ 85040  
 P: 602.431.8887 · F: 602.431.8889 · www.pnltest.com

# LABORATORY TEST REPORT

## SHEAR (LATERAL) LOAD

90° Flat Tile Roof Hook  
 w/ 9 mm mounting screw slot

CLIENT		CLIENT PROJECT REF. NO.		CLIENT ORDER NO.	
SolarRoofHook		17540, 17541, 17542, 17543		Per S.A.	
SAMPLE DESCRIPTION			ROOF HOOK ID		PRODUCT KIT ID
90° Flat Tile Roof Hook, 38 mm Height			17541, 17543		17540, 17542
MATERIAL SUBMITTED BY		PNI PROJECT NO	S O NO	PNI LAB NO	REPORT DATE
Client		26-170169	001	ML827506	04/11/2017
TEST SPECIFICATIONS & EQUIPMENT INFORMATION					
TEMPERATURE:		73° ± 3°F		HUMIDITY:	
EQUIPMENT MODEL:		Instron 5985		SERIAL NO:	
LOAD CELL:		10 kN (2,248 lbf)		SERIAL NO:	
TEST SPEED:		0.09 in./min.		FASTENER TYPE:	
FASTENER LOCATION:		Fasteners (Qty 2) installed in mounting screw slots.			
SHEAR LOAD TEST DATA					
NO.	MAXIMUM LOAD (lbf)	DISPLACEMENT AT LOAD (in.)	OBSERVATIONS		
5	289.1	0.551	Permanent deformation of rail attachment section		
6	343.0	0.441	Permanent deformation of rail attachment section.		
AVG.	316.1	0.496			

### PHOTOS



Photo 9: Shear Test Setup

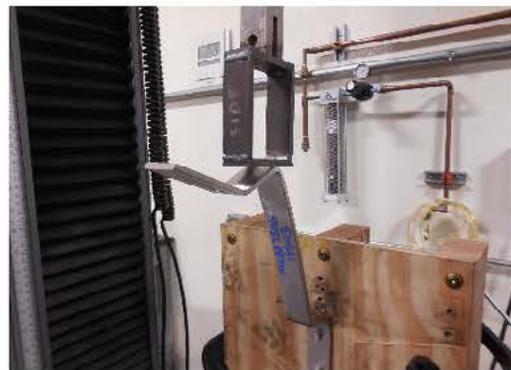


Photo 10: Adjusted Test Setup to Accommodate Flexure



Photo 11: Deformation of Hook at Base



Photo 12: Typical Failure Mode - Deformation at Base

CLIENT	CLIENT PROJECT REF. NO.	CLIENT ORDER NO.		
SolarRoofHook	17540, 17541, 17542, 17543	Per S.A.		
SAMPLE DESCRIPTION	ROOF HOOK ID	PRODUCT KIT ID		
90° Flat Tile Roof Hook, 38 mm Height	17541, 17543	17540, 17542		
MATERIAL SUBMITTED BY	PNL PROJECT NO.	S.O. NO.	PNL LAB NO.	REPORT DATE
Client	26-170169	001	ML827506	04/11/2017

**TEST MOCKUP CONFIGURATION**

The base for the test assemblies was made from three 12 in. long Douglas Fir 2"x4"s screwed to 12 mm Birch plywood using 5/16" x 3-1/8" RSS Rugged Structural screws. The Roof Hooks were then attached using two of the Client provided #14 x 3" Solar Mounting Screws. On roof hooks that had multiple mounting screw slots, the screws were set at the furthest end of the furthest slot from the 90° section of the roof hook. The mounting screws were screwed through the plywood and into a 2"x4" underneath. On adjustable roof hooks, the 90° roof hook attachment was connected at one extreme end and the mounting screws were attached in screw slots at the opposite end.

**PHOTOS**



**Photo 13:** Test Mockup Base Assembly



**Photo 14:** Fasteners for Plywood to 2x4: 5/16 x 3-1/8" RSS Rugged Structural Screws



**Photo 15:** Douglas Fir 2x4 Product Tag



**Photo 16:** Birch Plywood Product Tag